
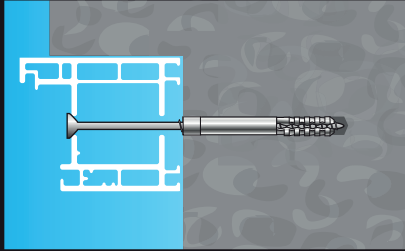


NEW!


Drill special windows and doors frames

Hammer drill SDS-plus

APPLICATIONS

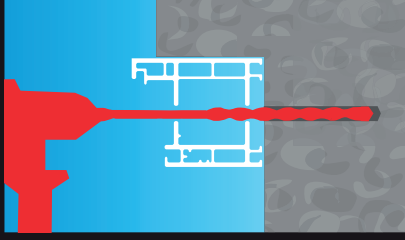


Ø 6 fixing with fastening

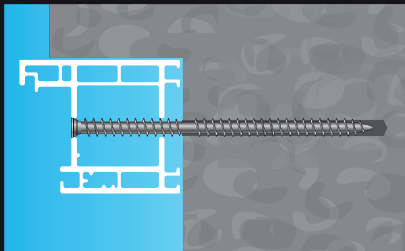

Ø 6.5 fixing with concrete screw


MATERIALS



FOR NEW BUILDING OR RENOVATION

RESIST TO FLEXION

WITH SPECIFIC GEOMETRY, THE DRILL BIT RESISTS TO THE FLEXION WITHOUT BREAKING.



The conical part strengthens the bit

The full part is longer : the body is more resistant



Attachment SDS-plus




Self-centering tip

135° angle, for a better chiseling effect

MONOBLOC CARBIDE TIP

Monobloc carbide tungsten with 3 cutting edges




3 CONTACT POINTS

PERFECT HOLES

The 120° angle guarantees perfect concentric holes (3X120°=360). The booster enables straight drilling.

Ref. 102



Available Range in individual packaging

Ø 6 - 6.5 mm - L. 210 - 260 mm

Ø 15/64 - 1/4 inches L 8 - 10 inches

Ø 6.5 mm - L. 310 mm - Ø 1/4 inches L 12 inches



DIAGER®