


# MADERA SIERRA DE SABLE

Ref.  
**L200W**




## ESPECIAL PARA YESO Y FIBRA CEMENTO

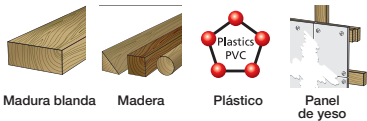


### Descripción

• Dientes triscados fresados. Corte rápido. Todo tipo de maderas, plásticos, panel de yeso (6-100/250 mm).



	L	Lu	mm/tpi	Larg.	Ep.	Ref.	Gencod	Qt.	Pack
	150	130	4.2/6	19	1.27	L200WL1505	3336600177963	5	D
	150	130	4.2/6	19	1.27	L200WL15025	3336600184428	25	L
	150	130	4.2/6	19	1.27	L200WL150100	3336600184640	100	O
	300	280	4.2/6	19	1.27	L200WL3005	3336600177970	5	D

**L201W**




## ESPECIAL PARA MATERIALES COMPUESTOS



### Descripción

• Dientes triscados fresados. Hoja flexible. Corte rápido. Todo tipo de maderas, plásticos, materiales compuestos (6-100 mm).



	L	Lu	mm/tpi	Larg.	Ep.	Ref.	Gencod	Qt.	Pack
	150	130	4.2/6	19	1.27	L201WL1505	3336600177987	5	D
	150	130	4.2/6	19	1.27	L201WL150100	3336600184664	100	L
	225	205	4.2/6	19	1.27	L201WL2255	3336600177994	5	D

**L202W**




## ESPECIAL MADERA VERDE



### Descripción

• Dientes triscados rectificados y reforzados con tratamiento térmico. Madera verde, leña (<190 mm).



	L	Lu	mm/tpi	Larg.	Ep.	Ref.	Gencod	Qt.	Pack
	240	220	6.35/5 4/5	19	1.27	L202WL2405	3336600178007	5	D
	240	220	6.35/5 4/5	19	1.27	L202WL24025	3336600184466	25	L
	240	220	6.35/5 4/5	19	1.27	L202WL240100	3336600184688	100	O