


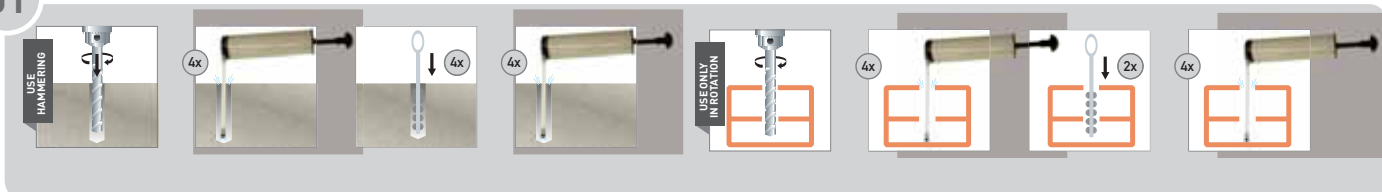
CHEMICAL FIXINGS

See the technical data sheets on catalog on our website
www.diager.com


| | | | | | |
|--|---|---|---|---|------------------------|
| Features |  300 POLY + 400 POLY +  | 300 V PRO + 400 V PRO + 400 V WINTER 400 V TROPICAL  | 265 EPOXY PURE 470 EPOXY PURE  | | |
| Applications |  |  |  | | |
| Service temperatures |  - 40° + 50° | - 40° + 120° | - 40° + 80° | | |
| Materials |  |  |  | | |
| Flooded hole / Underwater installation |  |  |  | | |
| Open time & Curing time |  20°C 6 min 45 min | 20°C 7 min 30" 40 min | 0°C 25 min / 1h40 - 20°C 2h / 24h | 20°C 14 min / 1h 50°C 2 min / 20 min | 20°C 50 min 16 h |
| Load |  |  |  | | |
| Storage |  + 25°C + 5°C | + 30°C + 5°C | + 30°C + 5°C | | |
| Conservation |  12 months | 12 months | 24 months | | |
| Approval |  |  |   | | |

Installation procedure


01



02



03

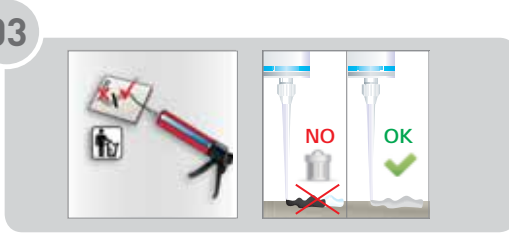

04

